



### Technical Characteristics

- Patented high speed motor (VFD integrated)
- Compact & light weight
- MODBUS compatible
- 18,000 hours maintenance free

### Electric Motor


- Insulation Class H
- VFD/VSD Integrated
- Adjust speed instantly via HMI or MODBUS  
3rd party PLC
- IP65

### Options

- 3Ph 380V
- 50 or 60Hz

Rpm	Pressure																	
	10kPa		15kPa		20kPa		25kPa		30kPa		35kPa		40kPa		45kPa		50kPa	
	Flow Rate (m <sup>3</sup> /min)	Power (kW)	Flow Rate (m <sup>3</sup> /min)	Power (kW)	Flow Rate (m <sup>3</sup> /min)	Power (kW)	Flow Rate (m <sup>3</sup> /min)	Power (kW)	Flow Rate (m <sup>3</sup> /min)	Power (kW)	Flow Rate (m <sup>3</sup> /min)	Power (kW)	Flow Rate (m <sup>3</sup> /min)	Power (kW)	Flow Rate (m <sup>3</sup> /min)	Power (kW)	Flow Rate (m <sup>3</sup> /min)	Power (kW)
60k			9.00	3.1	8.00	3.2	6.2	3.0										
65k			10.0	4.0	9.1	4.2	8.4	4.2	7.2	4.0	5.6	3.6						
70k			11.0	4.8	10.6	5.0	10.0	5.1	9.0	5.2	8.0	5.0	5.8	4.5				
76k					11.5	6.5	11.4	6.5	11.2	6.7	9.8	6.8	8.7	6.6	6.4	6.4	6.2	6.2

## Performance Range

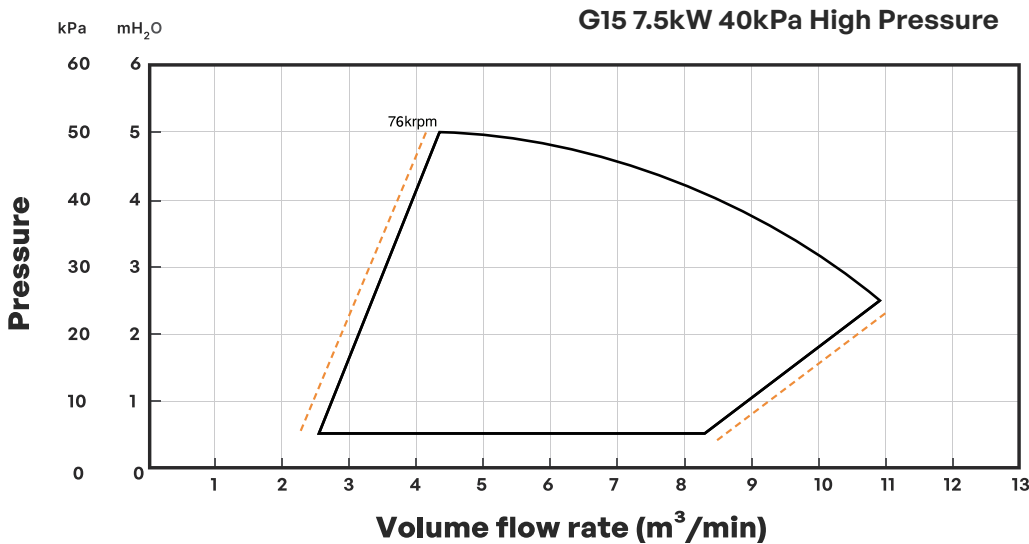

Get Smart About Energy –  
Scan for Your Savings.


for more information visit  
[www.sprintex.com.au](http://www.sprintex.com.au)  
[www.smartaeration.au](http://www.smartaeration.au)




Model	Max. Pressure kPa gauge	Max. Flow Rate m <sup>3</sup> /min	Max. Flow Rate m <sup>3</sup> /h	Max. Speed rpm	Rated Power kW	Dimensions W x D x H mm	Compressed Air Connection Φ mm Hose Clamp	Max. Sound Pressure Level dB(A)	Mass kg
G15 7.5kW 40kPa High Pressure	50	11.5	690	76,000	7.5	601 x 265 x 374	75	74	14.8

## Dimensions

Front View

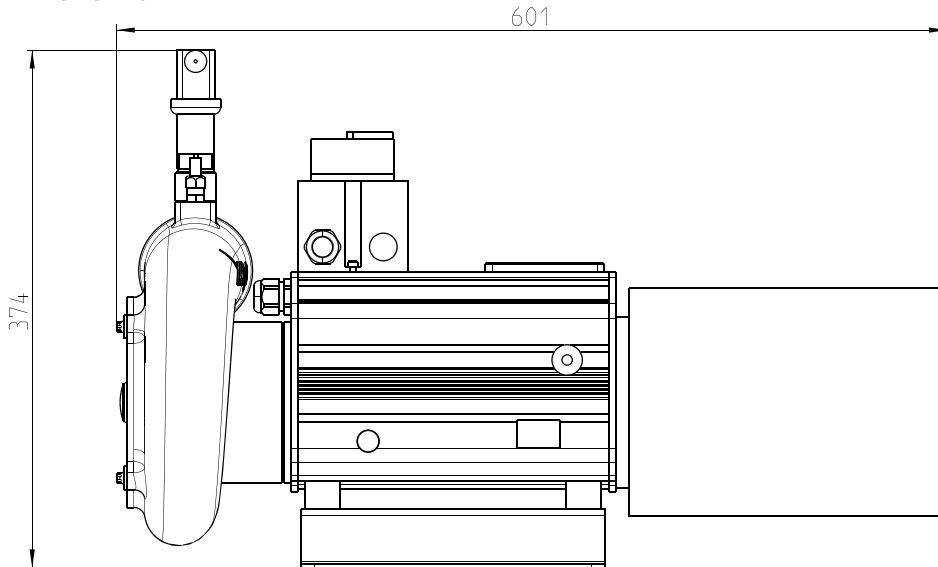

Side View

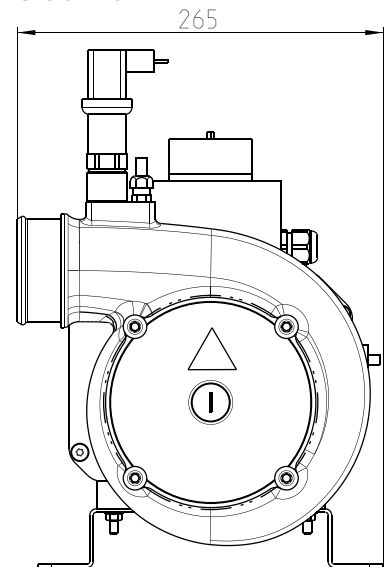

Top View

